




PSP 2000 Display Replacement

Written By: espinks

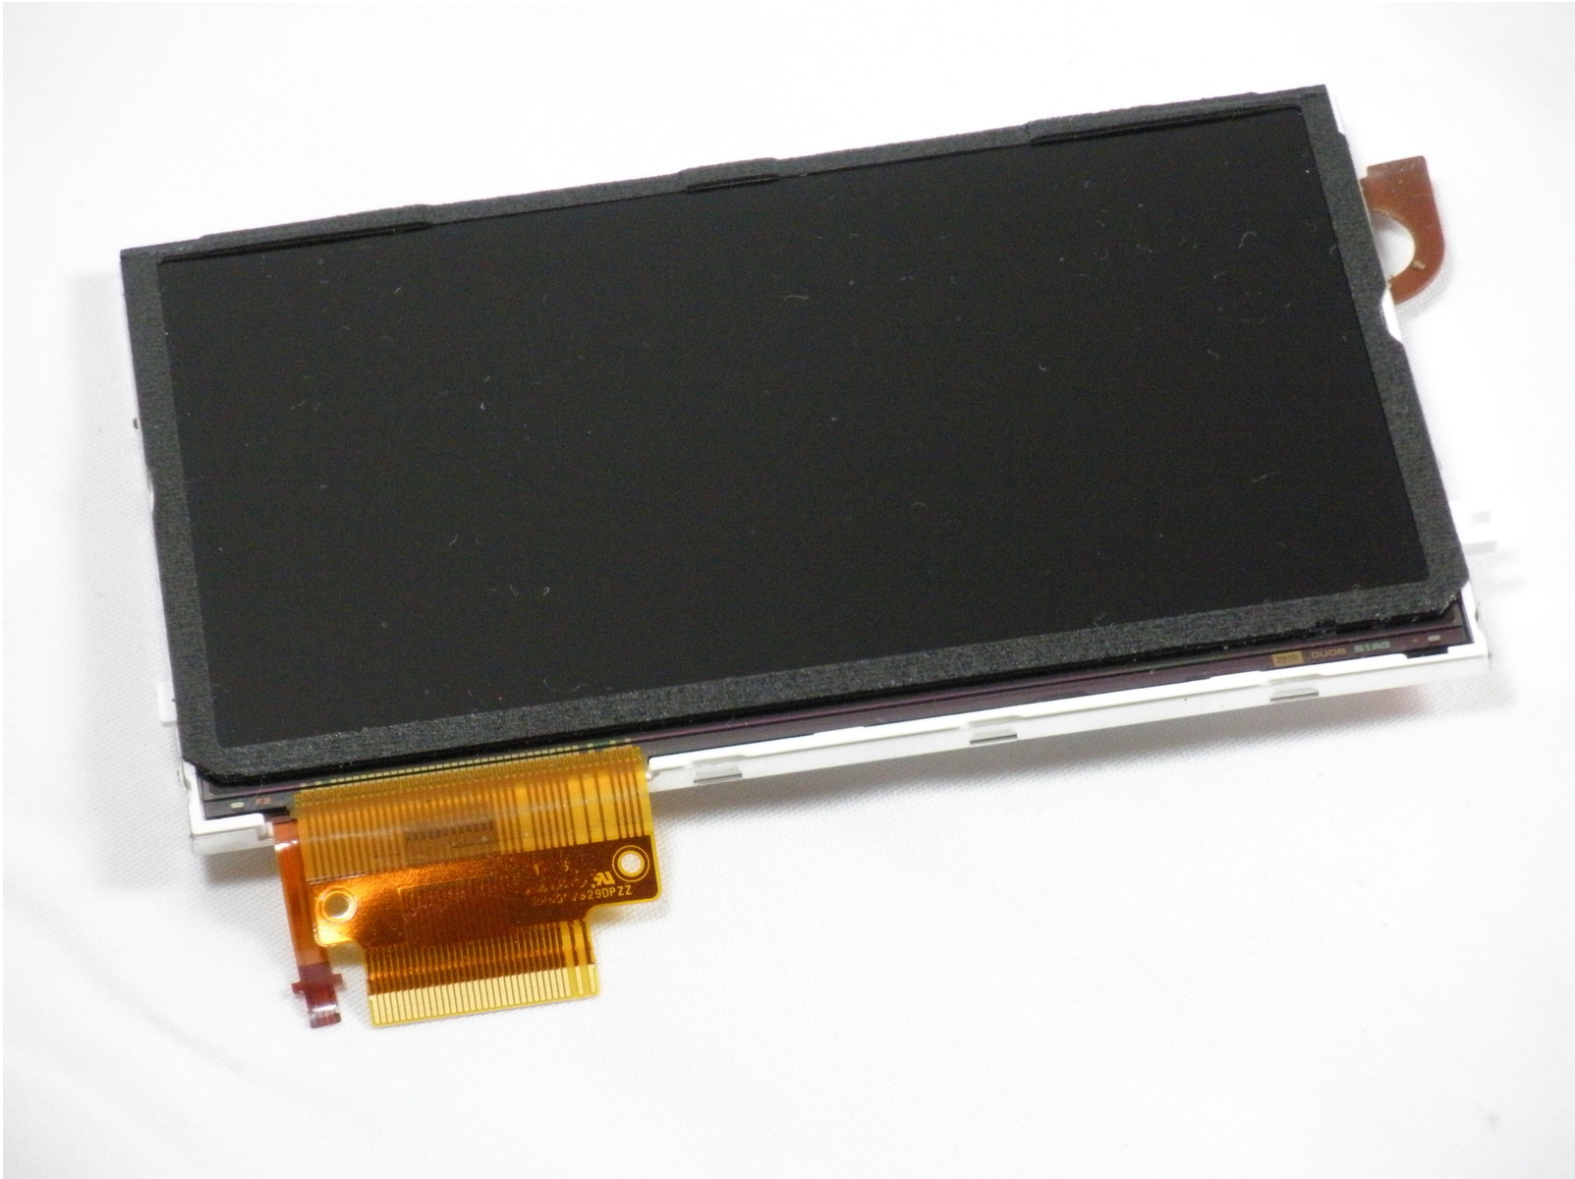

INTRODUCTION

Cracked/broken LCD? No problem! Replace it with ease.



TOOLS:


- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)



PARTS:

- [Sony PSP 2000 LCD](#) (1)
- [Sony PSP 2000 300x LCD Bracket](#) (1)
- [Sony PSP 2000 Home Bar](#) (1)
- [Sony PSP 2000 Left Button Contact Cable](#) (1)
- [Sony PSP 2000 Right Button Contact Cable](#) (1)
- [Sony PSP 2000 Power Switch Board](#) (1)
- [Sony PSP 2000 Wi-Fi Antenna](#) (1)

Step 1 — Battery

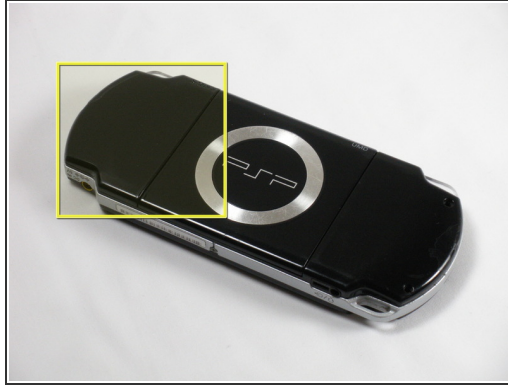

- Place PSP face down, so that the UMD Drive is facing upwards.
- Locate the battery door and open.
- Remove the battery from inside.


Step 2 — Front Casing



⚠ This step requires the removal of the warranty sticker. **Removing the sticker will void the warranty.**

- Locate the sticker in the battery compartment labeled: *"En: Warranty Void if Seal Damaged."*
- Remove the sticker using the PSP Opening Tools.
- ⓘ Under the sticker is a 5mm Phillips screw needed in the next step.

Step 3

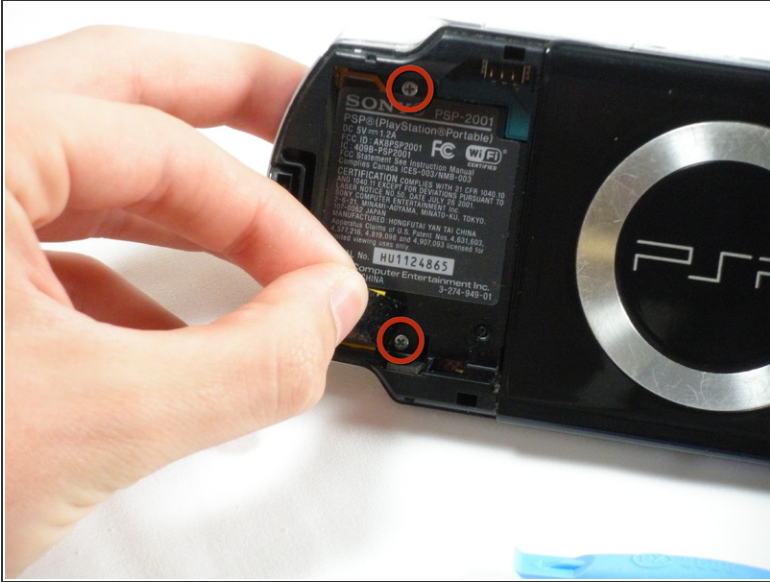

- Remove four 5 mm Phillips from the case.

ⓘ If the screws stick in the case, you can use a magnetized screwdriver to draw them out.

Step 4



- Remove the following screws from around the bezel:

- Two 4 mm Phillips

- One 5 mm Phillips


☑ The two shorter 4 mm screws are on the top of the PSP; the longer 5 mm screw is on the bottom.

Step 5



- Gently pry the front bezel away from the casing using a PSP opening tool.
 - Start on the right hand side of the PSP bezel, and carefully work the tool around the side.
- i** If you want to clean the control buttons or D-pad, you can easily pop them out once the faceplate is off and wipe them clean.

Step 6 — Display

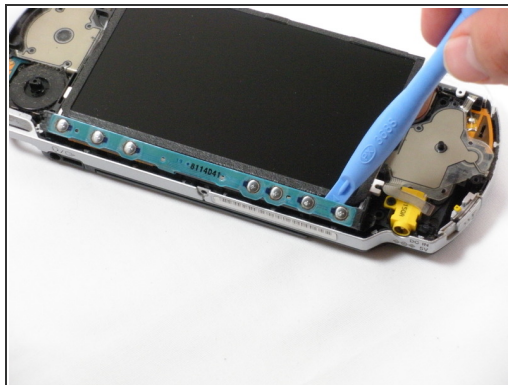

- Remove the home bar by gently prying on the left and right sides of it with the opening tools. Lift the bar out of the device.
- !** A ribbon cable connects the home bar to the logic board. Be careful not to damage the cable when removing the bar.

Step 7



- With the home bar out of the way, gently pry up the display using the opening tools.
- ⚠ There is another ribbon cable attached to the bottom of the LCD. Be careful not to damage either of the connectors when removing.
- Lift the black tabs of the ribbon cable connectors using a opening tool. Pull the ribbons out towards the bottom of the PSP to disconnect.
- Gently lift out the display.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-22 08:47:42 AM.